




Explosion Proof Peristaltic Pump

EXP600/YZ35

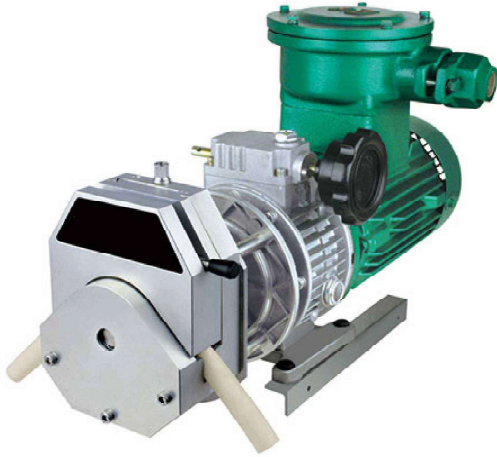


Features

Driven by explosion-proof motor, the power is strong.
Stepless speed regulation, reversible.

IP rate: IP55
Suitable for inflammable and explosive industrial sites.

Installation Sizes Drawing (Unit: mm)

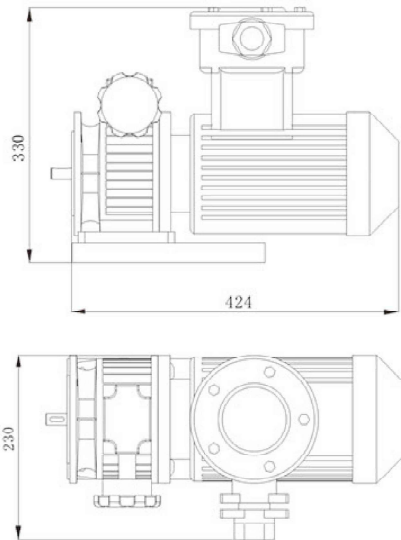

Explosion Proof Peristaltic Pump

EXP600/YZ1515x



Technical Specifications

Speed range	180-600 rpm	Drive dimension	424×230×330 (mm) (L×W×H)
Speed control	Manual stepless speed regulation	Drive weight	30 kg
Voltage	AC 3 phase 380V	Relative humidity	<80%
Condition temperature	0~40°C	IP rate	IP55

Product Composition and Flow Rate Range

Drive	Speed	Pump Head	Tubing Size	Flow Rate (mL/min)
EXP600	180-600rpm	YZ1515x	13", 14", 19", 16", 25", 17", 18"	12.6~2280
		YZ2515x	15", 24"	306~1740
		YZ35	26", 73", 82"	1242~12000
		DZ25-3L	15", 24", 35", 36"	379.8~3600
		DZ25-6L	15", 24", 35", 36"	540~6000
		SN15	14", 16"	43.2~528
		SN25	24"	450~1500

